


**NEW**

**NON-PENETRATING  
PNEUMATIC STUNNER  
Model USSS-2 & USSS-2A**

**NEW**

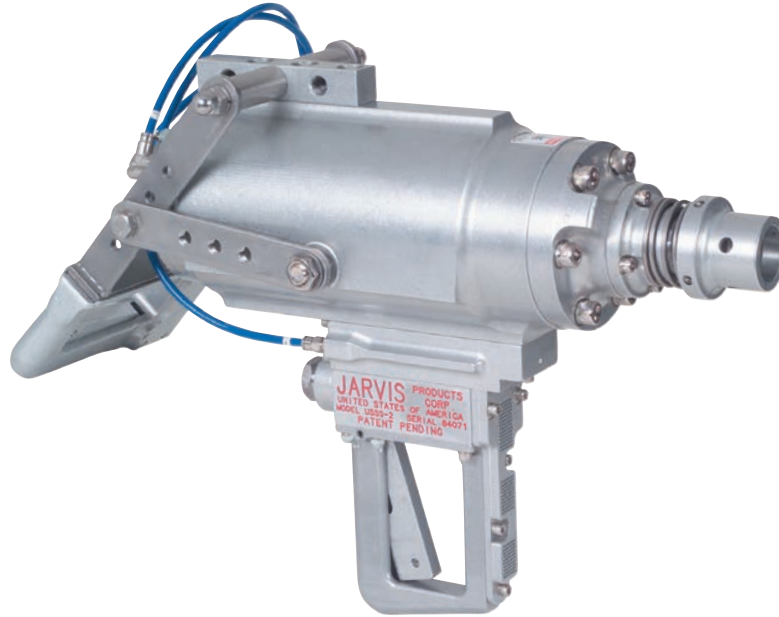

Patent No. 6,135,871  
Patents Pending Worldwide


**The Jarvis Model USSS-2 & 2A-  
pneumatically operated high speed, non-  
penetrating stunner for cattle and veal.**

- Unique design renders the stunned animal insensible to pain, without penetrating the skull.
- One shot humane stunning procedure. Fires only once - no multiple firing needed.
- Better stunning for improved meat quality.
- Two hand control for safer operation.
- Easy to handle and safe to operate - no recoil or kick back - less operator fatigue.
- Easy to repair and clean.
- Lightweight - tool only weighs 36 pounds (16.3 kg).

**JARVIS**



Non-penetrating stunner used with monorail restrainer.

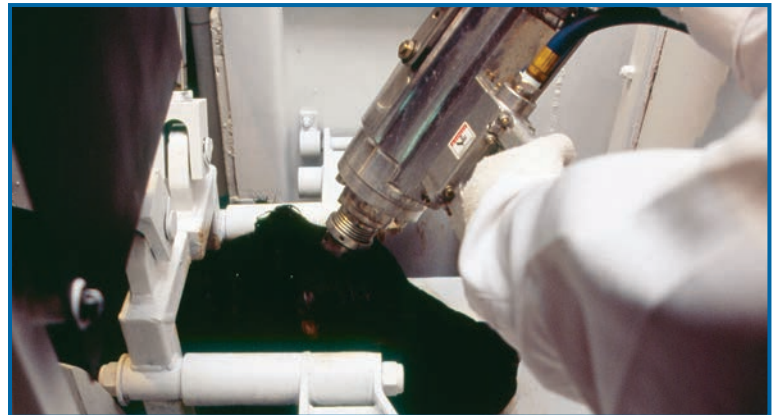

Non-penetrating stunner used with head restrainer.

**HUMANE - SAFE - EFFICIENT**

# NON-PENETRATING PNEUMATIC STUNNER Model USSS-2 & USSS-2A

<b>Specifications</b>
-----------------------

<b>Drive</b>	Pneumatic	
<hr/>		
<b>Model USSS-2 &amp; USSS-2A</b>		
Operating Pressure (maximum)	190 - 245 psi	13.1 - 16.9 bar
Air Consumption (per cycle)	1.45 ft <sup>3</sup>	41 L
Stunning Rod Diameter	1.38 in	34.9 mm
Control Handles		
Dual Triggers / Dual Handles	Pneumatic	
Overall Dimensions (l x w x h)	19 x 5.5 x 15 in	
483 x 140 x 381 mm		
Weight	35.8 lbs	16.3 kg

<b>Equipment Selection and Accessories</b>	<b>Order Number</b>
--	---------------------

Model USSS-2 Non-Penetrating Pneumatic Stunner		
for use in knocker box		4044006
for use in restrainer		4044007
<hr/>		
Model USSS-2A Non-Penetrating Pneumatic Stunner		
for use in knocker box		4044011
for use in restrainer		4044010
rear handle knocker box		4044012
<hr/>		
Air Compressor (250 psi)	5 hp	10 hp
460 V / 60 Hz	4061361	4061366
400 V / 50 Hz	4061362	4061379
575 V / 60 Hz	4061363	4061382
380 V / 60 Hz	4061364	
415 V / 50 Hz	4061378	4061380
230 V / 60 Hz	4061376	
220 V / 50 Hz	4061377	
<hr/>		
Model AST-102 Pneumatic Stunner Tester - USSS-2		
120 V, 60 Hz		4016007
230 V, 50 / 60 Hz		4016008
<hr/>		
Model AST-103 Pneumatic Stunner Tester - USSS-2A		
120 V, 60 Hz		4016009
230 V, 50 / 60 Hz		4016010
<hr/>		
Model MSPR-1 Three-Way Pressure Setting Air Regulator, with Filter and Lubricator		
120 V		3063374
230 V		3063375
<hr/>		
Air Hose Assembly	Coiled	3059045
	Straight	3059046
<hr/>		
Balancer		4042046



Products for the meat and poultry industry